

USI 850 J WATERTIGHT

Manhole cover E600

EN124-2 by



heavy traffic



round frame



EPDM seal



machined contact sides





watertight



OPTION



Locking screw

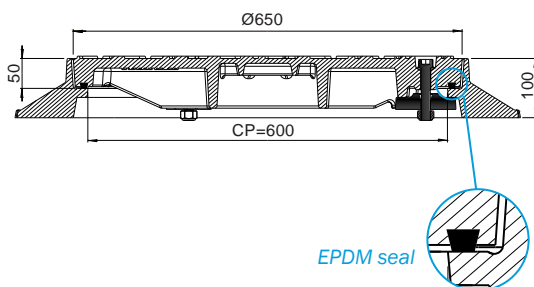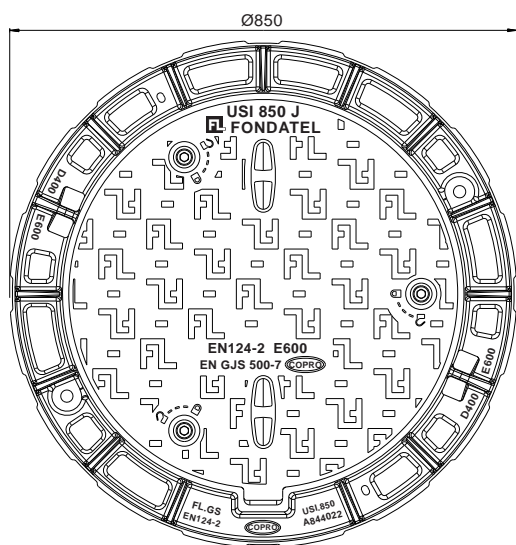

EPDM seal

DESCRIPTION

Watertight machined round-frame manhole cover, E600 heavy traffic.

ADVANTAGES PRODUCT

Silence and stability

- Cover machined with EPDM joint ensuring sealing and stability.
- Antiskid design for low noise nuisance
- Waterproofness is ensured by tightening on 3 points.
- Waterproof under pressure or vacuum
- Protection of locking screws using caps.

Implementation and use

- 2 handling rings on the base of frame.
- Reinforced frame, particularly rigid, with a base of frame little perforated, provide a large supporting surface for an effective sealing.
- 4 holes on the base of frame for a possible pegging.
- Pad fitted with an anti-rotation tab.
- 2 waterproof gripping points for opening with a pie or hook.
- Locking and unlocking with a « allen » 14 mm type key.

MATERIAL

Ductile iron GJS 500-7 depending on EN1563

PLACE OF INSTALLATION

Group 5, class E600 → see EN124-1

Specially designed for heavily trafficked roads. Also suitable for areas such as airplane runways and docks.

REFERENCE	ARTICLE N°	ARTICLE N° COPRO	KG	PACKING
USI-J 850 round watertight	844034	0452/0239	100	9

Sizes in mm - Weights, sizes and sketch are indicative - Uncontrolled distribution.

USI 850 J WATERTIGHT

Manhole cover E600

EN124-2 by



heavy traffic



round
frame



EPDM
seal



machined
contact sides



watertight



OPTION



<https://fondatel.com/index.php/environmental-policy-2/?lang=en>
<https://qr.co2logic.com/52518ea7746fcbcc911c6b2a8873e80>



The validity of the data sheet can be checked using the device article n° COPRO on the COPRO website. <https://extranet.copro.eu/en/Sheets>

ENVIRONMENT

0 kg CO₂/product through compensation (*)

(*) Following our balance sheet of carbon dioxide emissions, Fondatel made an action plan to reduce its carbon dioxide emissions with 20% latest 2025 following European regulations.

In order to compensate actual balance of emissions which can't yet be avoided, Fondatel engaged itself to invest into certified climate projects, which themselves help to lower global carbon emissions and present multiple gains described in the list of Objectives of Sustainable Development by United Nations.

Compensation is 208,00 kg CO₂/product

CERTIFICATION THIRD PARTY

Copro

OPTION

- Marking/logo on request

VARIANTS

- Version without lock (USI 850 J)
- Version without lock and seal (USI 850).

Sizes in mm - Weights, sizes and sketch are indicative - Uncontrolled distribution.